


SERIES 2000 R-40 PICTURE WINDOW

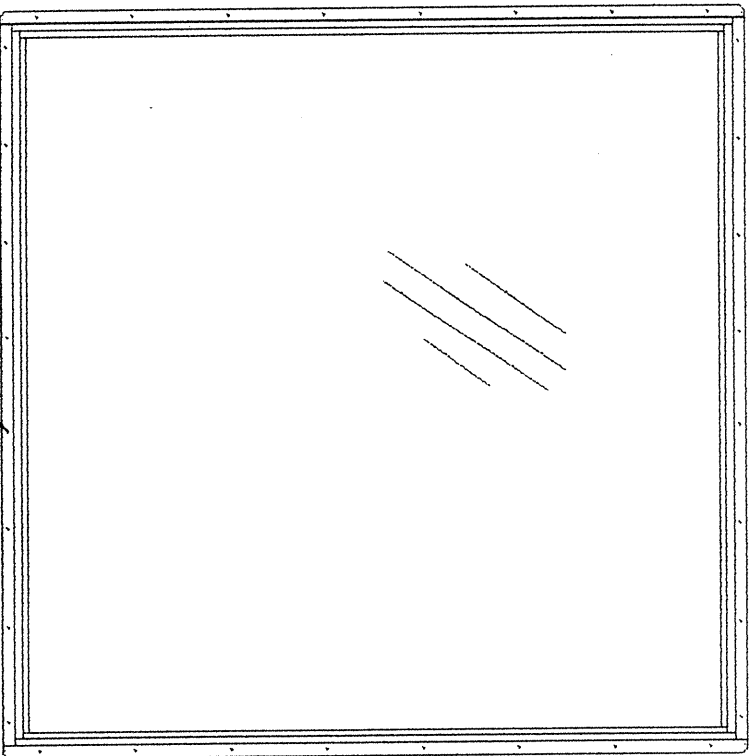

#6 X 1 3/8" DRY WALL
SCREWS AT 8" MAX O.C.


LEGENDS WINDOWS

INSTALLATION NOTES:

1. - IN THE OPENING USE 2" X 8" DOUGLAS FIR MINIMUM.
2. - USE #6 X 1 3/8" DRY WALL SCREWS AT 8" MAX O.C. TO ATTACH FIN TO OPENING.
3. - MAXIMUM WINDOW SIZE: 5'0" X 5'0" OR 25 SQFT. NOT EXCEEDING 8'0 ON WIDTH OR HEIGHT.
4. - THIS INFORMATION IS NOT APPLICABLE TO MULLED UNITS.

TEST REPORT SUMMARY:

OVERALL DESIGN PRESSURE: 40 PSF
 AIR INFILTRATION: < 0.01 CFM/SQFT
 WATER RESISTANCE: 6.75 PSF
 STRUCTURAL TEST PRESSURE: +60.0 PSF / -60.0 PSF
 FORCED ENTRY RESISTANCE: CAWN 301-90
 ATI TEST REPORT #: 03-30875.01

 DIBUJO DE INSTALACION		NUMERO DE SERVICIO 1-2300PW	
		HOMER DEL PRODUCTO VENTANA PIVA SERIE 2000 R-40	
CLIENTE VENTANAS CUPRUM		ESCALA SIN ESCALA	
MODIFICACIONES (VER FIRMAS)		FECHA	
DISEÑO LIC. D. GARCIA	ASISTENTE ING. B. HERNANDEZ	DISEÑO LIC. D. GARCIA	FECHA 10/MAYO/02
REVISIONES			
3	2	1	Z
Se aplican las tolerancias comerciales o menores que se especifican otras.			

The information, design or data shown on this document or electronic media is the exclusive property of Ventanas Cuprum, S.A. de C.V. It is considered confidential and proprietary and is made available for limited use only. Its use or reproduction without the express written consent of Ventanas Cuprum, S.A. de C.V. is prohibited.