



Wayne A. Block, Ph.D., P.E.
Donald P. Block, P.E.

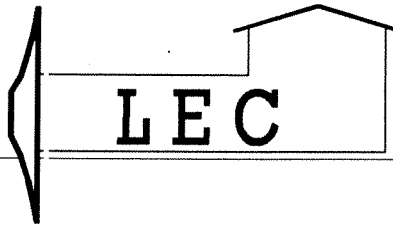

Lildon Engineering Company, Inc.
906 Jan Mar Ct. Ste.E
Clermont, Florida 34711
(352) 394-2590 Ph. & FAX

BUILDERS CHOICE WINDOW AND DOOR CALCULATIONS FOR SERIES 1000 ALUMINUM FIXED GLASS

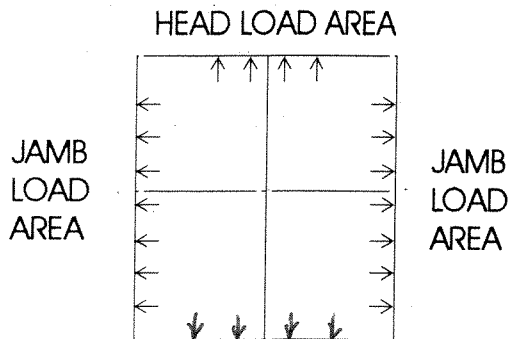

TRAPEZOIDAL LOAD PATTERN MASONRY

FASTENER CALCULATIONS WERE DONE FOR 30, 40, 50, 60, AND 90 PSF.


FASTENER: 3/16 DIA COLD ROLLED CONCRETE SCREW
DESIGN SHEAR STRENGTH OF FASTENER = 250 LBS

CALCULATION FOR NUMBER OF FASTENERS:

REQUIRED NUMBER OF FASTENERS = $\frac{\text{LOAD AREA IN SQ. FT.} \times \text{DESIGN PRESSURE}}{\text{DESIGN SHEAR STRENGTH OF FASTENER}}$

NOTE: THE NUMBER OF FASTENERS WERE ROUNDED UP.

WHILE REMAINING FACTORY INSTALLATION HOLES ARE TO BE FILLED WITH #8 SCREWS, THIS FASTENING WAS NOT FIGURED INTO LOAD CALCULATIONS, NOR THE FASTENING OF 1x WINDOW BUCK TO CONCRETE.

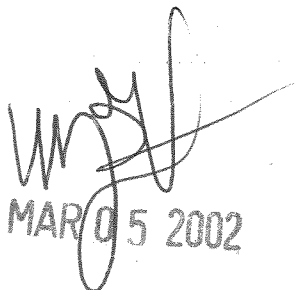
MAR 05 2002