


# SERIES 2000 R-40 SINGLE HUNG

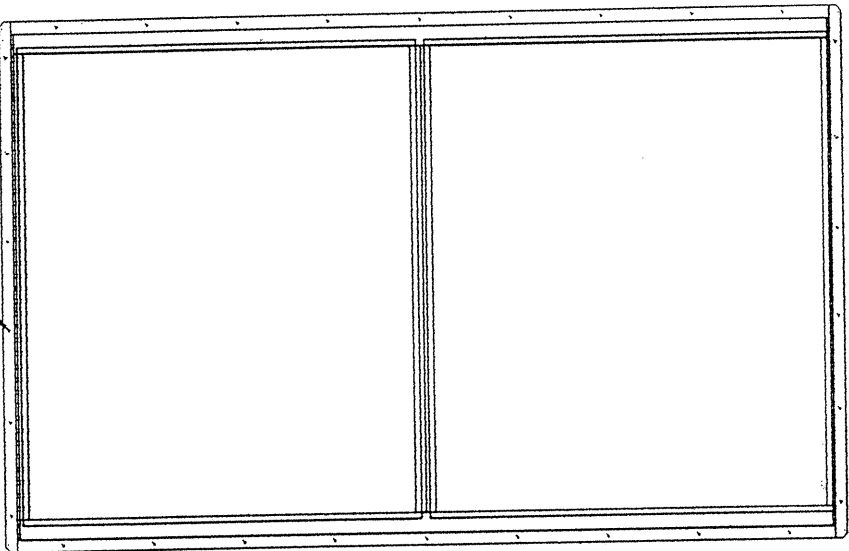

#6 X 1 3/8" DRY WALL  
SCREWS AT 8" MAX O.C.

The information, design or data shown on this document or electronic media is the exclusive property of Ventanas Cuprum, S.A. de C.V. It is considered confidential and proprietary and is made available for limited use only. Its use or reproduction without the express and written consent of Ventanas Cuprum, S.A. de C.V. is prohibited.

## LEGENDS WINDOWS


### INSTALLATION NOTES:

1. - IN THE OPENNING USE 2" X 8" DOUGLAS FIR MINIMUM.
2. - USE #6 X 1 3/8" DRY WALL SCREWS AT 8" MAX O.C. TO ATTACH FIN TO OPENING.
3. - MAXIMUM WINDOW SIZE: 3'8" X 6'0"
4. - THIS INFORMATION IS NOT APPLICABLE TO MULLED UNITS.

### TEST REPORT SUMMARY:

OVERALL DESIGN PRESSURE: 40 PSF  
 OPERATING FORCE: 27 LBF  
 AIR INFILTRATION: 0.18 CFM/SQFT  
 WATER RESISTANCE: 6.00 PSF  
 STRUCTURAL TEST PRESSURE: +60.0 PSF / -60.0 PSF  
 DEGLAZING: PASS  
 FORCED ENTRY RESISTANCE: AAMA 1302.5  
 ATI TEST REPORT #: 03-30408.02

1	3		
2	2		
3	1		
R E V I S I O N E S		F E C H A	
Se aplican las tolerancias comerciales o menos que se especifican otras.			

 VENTANAS CUPRUM	DIBUJO DE INSTALACION	MANEJO DE DIBUJO 1-2300*W
	NOMBRE DEL PROYECTO VENTANA GUILLOTINA SERIE 2000 R-40	CLIENTE VENTANAS CUPRUM
ASESORIA LIC. D. GARCIA	ESCALA SIN ESCALA	ASESORADO ING. B. HERNANDEZ
FECHA 10/MAYO/02	LIC. D. GARCIA	